

4.0 PACKAGE CONTENTS

- 1) Main unit
- 2) 5V DC Power Supply.
- 3) User's Manual.

5.0 PANEL DESCRIPTIONS




6.0 CONNECTION AND OPERATION

- 1) Connect the HDMI input source and output devices into the HDMI Splitter.
- 2) Insert the DC side of 5v power supply into it and then connect the AC side of the power supply into the wall outlet.
- 3) Turn on the power.

Attention: Insert / Extract cable gently.

6.1 CONNECTION DIAGRAM

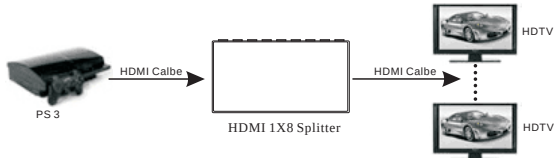

3

USER MANUAL

Table of Contents

1.0 Introduction.....	1
2.0 Features.....	1
3.0 Specifications.....	2
4.0 Package Contents.....	3
5.0 Panel Descriptions.....	3
6.0 Connection and Operation.....	3

HDMI 1X8 SPLITTER

Dear Customer

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

1.0 INTRODUCTION

This splitter is beautiful in appearance. It distributes the input of the HDMI signal into the eight identical outputs simultaneously. It supports HDCP and the real HDMI 1.3b. Its video amplifier bandwidth can be up to 2.25Gpbs/225MHz.

The HDMI Splitter offers solutions for HDTV retail and show site, HDTV, STB,DVD and Projector factory, noise, space and security concerns, data centercontrol, information distribution, conference room presentation, school and corporate training environments.

2.0 FEATURES

- * Cascaded: Large distribution achieved by cascading the HDMI Amplifier Splitter.
- * Support HDMI1.3b
- * HDCP pass-through
- * Support highest video resolution 1080p
- * High performance up to 2.25Gbps
- * Support uncompressed audio such as LPCM
- * Support compressed audio such as DTS Digital, Dolby Digital (including DTS-HD and Dolby True HD)
- * Support 3D

1

3.0 SPECIFICATIONS

Signal Input	HDMI Signal
Input Video Signal	0.5 -1.0 volts p-p
Input DDC Signal	5 volts p-p (TTL)
Maximum Single Link Range	1920X1200, 1080P
Output Video	HDMI 1.3b+ HDCP1.0/1.1/1.2
VGA	640x480,800x600,1024x768,1920x1200
HDMI Compliance	HDMI 1.3b
Video Amplifier Bandwidth	2.25Gpbs/225MHz
Interlaced(50&60Hz)	480i,576i,1080i
Progressive(50&60Hz)	480p,576p,720p,1080p
Limited Warranty	1 Year Parts and Labor
Operating Temperature	0℃ to +70℃
Storage Humidity	5% to 90 % RH (no condensation)
External Power Supply	5V DC
Converter Unit Cert.	FCC,CE
Power Supply Cert.	CE,FCC
AC Power Adapter	US standard, UK standard and so on
User Manual	English Version

Note: Specifications are subject to change without notice.

2

深圳市博胜电子技术有限公司

型号：PET0108 （说明书）

审 核	制作		采购	
	工程		经理	
	制作日期：2012-11-21			
接收部门：				